


Technický list produktu (datasheet): DTWA096045

# 19" nástěnný rozvaděč S-RACK 9U 600 x 450mm

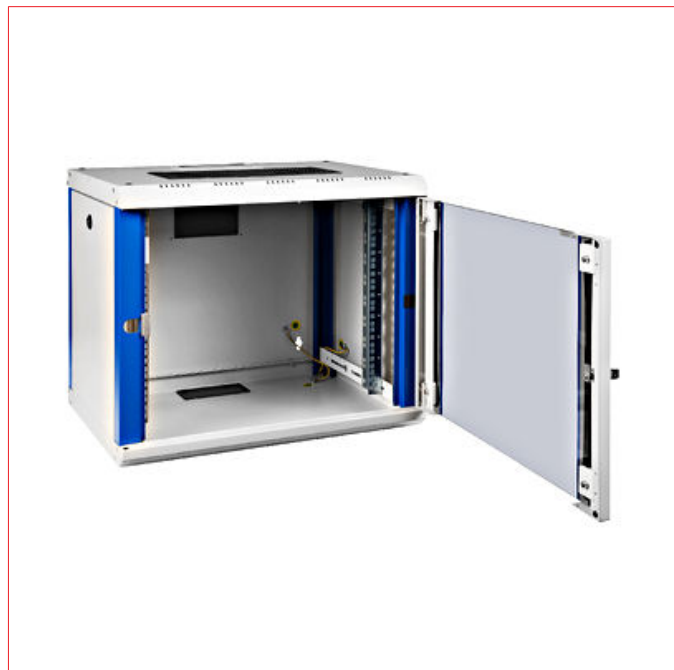

## SCHRACK-Info

Mainly used in offices and office-like environments, such as flats, single-family homes, etc. Suitable as a central distributor in small to medium-sized network installations, but also for use as a floor distributor (sub-distributor) in the horizontal area of structured cabling. The removable side panels allow convenient access to the installed components, even afterwards. For active cooling of the built-in components, optional DTLT fan units with one or two fans can be mounted in the roof.

**One-man installation:** A special feature of the DTWA enclosure is the convenient and quick one-man installation.

In the first step, the rear panel is removed from the enclosure and only this panel is fixed to the wall. Afterwards, the enclosure is only hung into the back wall and fixed. These operations can easily be carried out by a single fitter on the building site.

- **Material:** Powder-coated steel sheet housing
- **Material thickness:**
  - Top and bottom chassis: 1.2mm
  - Corner profile: 1.2mm
  - Rails: 1.5mm
  - Front door (glass): 4.0mm
  - Rear panel: 1.5mm
  - Side panel: 0.8mm
- **Colour:**
  - RAL7035 (light grey)
  - Corner profiles and strips: RAL5005 (signal blue)
- **Heights:** 7, 9, 12, 16 and 20U
- **Maximum load:** with even distribution: 100kg


- **Degree of protection:** IP20
- **Doors:** Glass door of safety glass 4mm including lock and 2 keys. Door hinged on the right. Conversion to left hinged possible. Opening angle of the door: approx. 200°.
- **Side panels:** removable and lockable
- **Rails:** 19" rails (2 pieces) in the front of the cabinet, galvanised, depth-adjustable, U marking present
- **Cable entry options:** in roof, floor and rear wall.
  - The floor and rear panel are provided with a plastic blank cover.
  - Roof is equipped with a sliding cable entry with rubber seal.
- **Cooling:**
  - Passive cooling through ventilation slots and heat exchange with the outside area.
  - Active cooling by optional DTLT fans, which are easily and quickly inserted into the roof from the outside. This can also be easily done out afterwards.
- **Earthing:** earthing set is included
- **Accessories:** Numerous accessories available (shelves, PDUs, cable management, blank panels, fan units, etc.)
- **Delivery:** Enclosure is completely assembled and delivered with assembly material




## Technické informace

Šířka (netto) (mm)	600,00
Výška (netto) (mm)	512,00
Hloubka (netto) (mm)	450,00
Hmotnost (netto) (kg)	17,60
EAN	9004840868784
Minimální teplota okolí (°C)	5
Maximální teplota okolí (°C)	40
U	9
Stupeň ochrany krytí	IP20
Max. zátěž (kg)	100


## Rozměrový výkres: 19" nástěnný rozvaděč S-RACK 9U 600 x 450mm

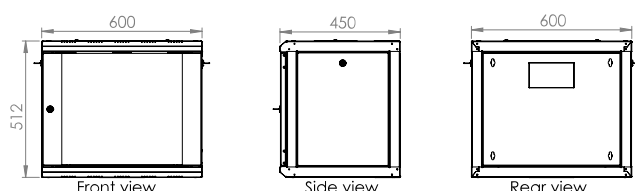


## Rozměrový výkres: 19" nástěnný rozvaděč S-RACK 9U 600 x 450mm

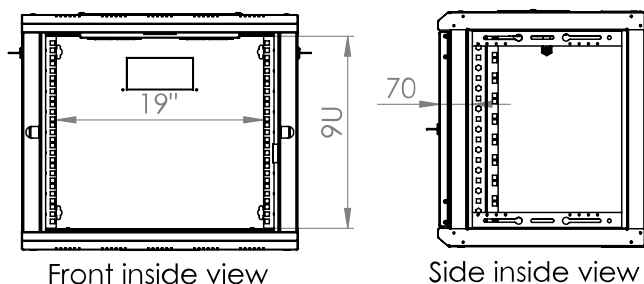


## Rozměrový výkres: 19" nástěnný rozvaděč S-RACK 9U 600 x 450mm

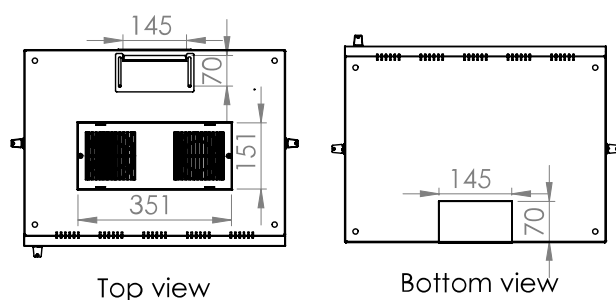

## Rozměrový výkres: 19" nástěnný rozvaděč S-RACK 9U 600 x 450mm

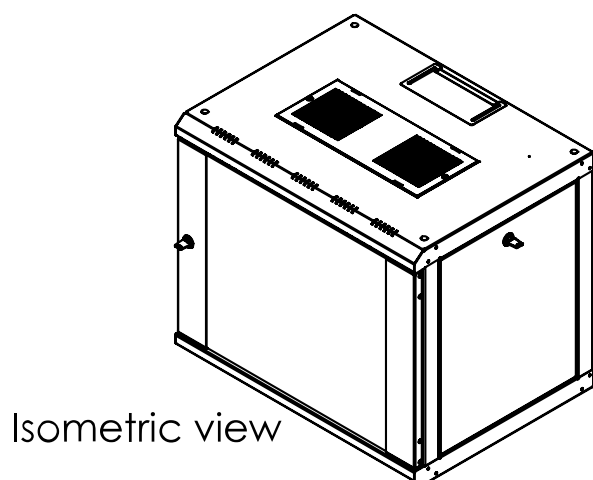

## Rozměrový výkres: 19" nástěnný rozvaděč S-RACK 9U 600 x 450mm

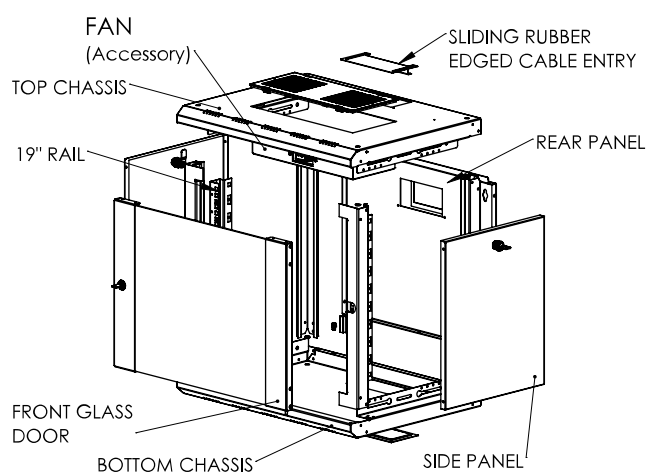

Exploded view

## Tabulka objednacích čísel

POPIS	OBJ. ČÍSLO
19" nástěnný rozvaděč S-RACK 9U 600 x 450mm	DTWA096045
<b>Volitelné příslušenství</b>	
Střešní ventilace pro S-RACK, 2 ventilátory, analog.termostat Analogový termostat, instalace z vnějšku rozvaděče, RAL 7035	DTLTR02A
Střešní ventilace pro S-RACK, 2 ventilátory, vypínač Instalace z vnějšku rozvaděče, RAL 7035	DTLTR02S
Střešní ventilace pro S-RACK, 1 ventilátor, analog.termostat Analogový termostat, instalace z vnějšku rozvaděče, RAL 7035	DTLTR01A
Střešní ventilace pro S-RACK, 1 ventilátor, vypínač Instalace z vnějšku rozvaděče, RAL 7035	DTLTR01S
19" profilové ližiny pro nástěnný S-RACK DTW 9U, 1 pár Balení: 1 pár	DTWPROF09
19" polička pevná, 300mm, 30kg, 1U, 2bodová, nízký profil, šedá 2bodová instalace, RAL 7035	DTFT1300
19" patchpanel pro max. 24 keystone, neosazený, 1U, RAL 7035 Dvoudílná konstrukce rámu a vyvazovacího panelu, barva světle šedá	HSER0240GS
19" vyvazovací panel 1U, 5x oko oceloplechové, RAL 7035 RAL 7035	DTBC105R
Montážní sada M6, 20x šroub, matice, podložka Pro montáž 19" prvků do rozvaděče	DTSRA020
Dveře perforované pro S-RACK série DTW 9U, 600mm, RAL 7035 Včetně montážního materiálu (panty, šrouby)	DTWART0961
Switch L2 neřízený 24xRJ45 10/100/1000, 19", interní PSU, tichý 19" provedení, kovové šasi, interní PSU	QLGSW2457